Panasonic and Poltys Inc.
Direct Care Connect

Poltys Direct Care Connect (DCC) solution helps Assisted living Facilities and Nursing Homes manage communications and personnel more effectively.

– Direct, Locate and Prioritize information for clinicians and their patients
– Continuous wireless connectivity between: nurses, caregivers, coordination desks, and patients
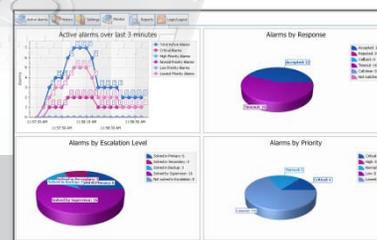
Benefits

- Provides quick, direct access to caregivers and staff
- Increases medical staff efficiency
- Workflow optimization
- Seamless integration with the top-selling nurse call systems
- Enables continuous wireless connectivity between nurses, caregivers, coordinators, and patients
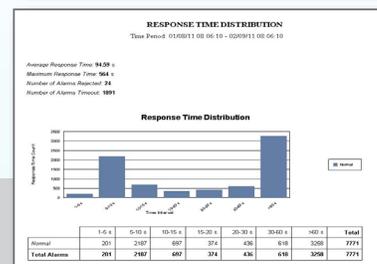- Monitor Performance and Efficiency

Key Features

- Immediate text display of patient, room and call status
- Direct callback to patient room
- Automatic forwarding to alternate caregiver
- Automatic patient assignment by shift
- Dynamic text messaging to Caregiver from Supervisor workstation
- Real-time alarm, queue and caregiver status
- Three Alarm Escalation Levels with supervisor email notification
- Fully programmable patient-caregiver-group assignments with individual alarm priorities
- Comprehensive alarm and actions logging with customizable reports
- Integrate with the top-selling nurse call systems

Supervisor Active Alarms

Custom Reports

Alarm History Log

Product Configurations

DCC Pro KX-DCC-42 Includes:

DCC Server Software
- Software and licenses for a combination of up to 3 Supervisors/Administrators
- Support for up to 42 Patient Alarm Points
- 4 Hours of Technical Support for Installation
- 1 Year service and Maintenance Agreement Contract

DCC Pro 12 license Pack KX-DCC-EX12 Includes:
- 12 Patient Alarm Points licenses that can be added to DCC Pro KX-DCC-42

DCC Pro 48 License Pack KX-DCC-EX48 Includes:
- 48 Patient Alarm Points licenses that can be added to DCC Pro KX-DCC-42

A server is required for the DCC Pro application. The server can be purchased independently or directly form Poltys. **Please contact Sales@poltys.com for details.**

System Requirements

Supported Panasonic PBX:
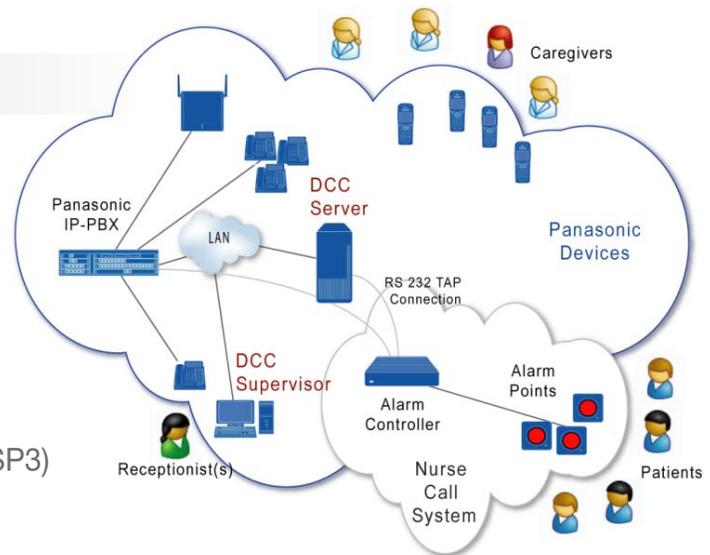
KX-TDA50G, KX-TDE100/200/600, KX-NCP500/1000

Connection:

To PBX – LAN/USB
To Nurse Call – Tap Port RS232

Vendor Application:

OS – Microsoft® Windows® XP Professional (SP3)
CPU – Pentium® 4 2.5GHz (or higher)
RAM – 1024 MB (or higher)
HDD – 10 GB Minimum (installation)

Nurse Call Systems that integrate with DCC:
General Electric (GE StaffCall Pro, GE Dukane 6000); Rauland Borg; Eiris (Eiris-EV2, Eiris-TAP); Telergy; Visonic Spider; AUSTCO-UDP; Homefree; COMP 2; Systems Technologies, Inc.